

DS-C10S-SXXT Series Video Wall Controller





Features and Functions





- A signal source can be displayed on the $M \times N$ ($M \geq 1, N \geq 1$) display units.
- Multiple signal sources are supported, including VGA, DVI, HDMI, SDI, YpbPr, DP, HDBaseT. Up to $3840 \times 2160@30$ Hz resolution is supported for HDMI, DP and HDBaseT signal inputs.
- Distributed network signal sources configurable to raise the signal source capacity and transmission distance.
- Live view in the roaming window and live view list.
- Fluent video output without frame extraction to guarantee the lossless output of 60 frames.
- An enhanced network decoding board supports H.264 and H.265 compression standard and can display network signal of 2-ch@8.0 MP, 2-ch@6.0 MP, 2-ch@5.0 MP, 8-ch@1080p, 16-ch@720p and 32-ch@D1 and local video files.
- Auto sub-stream decoding if the output resolution of decoding window is lower than 640×640 .
- Tile mode available and the video layers can be extended to 8 layers in tile mode.
- Supports 1/4/9/16 window division modes and full-screen switch of the window. (Unavailable for the LED mode)
- The window can be kept sticking on top without being affected by the operations of other windows and kept open without being affected by the scene or plan configuration.
- Up to 6 image layers can be displayed on one screen, including one virtual LED image layer and a background layer.
- The LED background color is adjustable. The resolution of background layer is up to 8192×8192 .
- The tile mode can be saved in the scene.
- Video wall mirror configurable to mirror the content of one video wall area to another area.
- Users have the permission to manage the signal sources and video wall.
- Built-in matrix feature for opening a signal source on several windows simultaneously.
- Matrix protocol of ZT1.0, ZT2.0, Extron, Creator and HIK_CVBS_96P supported and up to 4 matrixes with maximum 512 input channels of each matrix supported.
- Supports crossing-window video roaming. (Unavailable for the tile mode)
- Supports adjusting the output to match the virtual output of client software with real output of controller.
- Up to 16 devices can be managed and up to 5 virtual video walls can be displayed by a client server.
- Remote control via iOS client server, Android client server and IE browser.
- Supports opening windows to display video signal, with the window position and size adjustable.
- Supports SADP searching active IP address and resetting the password of administrator.
- The fan speed of the chassis is self-adaptive to the temperature.



- Supports both the LED screen mode with small pixel pitch and the normal screen mode.
- Self-adaptive to the configured LED resolution.
- Supports custom resolution access of DP, DVI and HDMI signal sources and characters overlap.
- Device running status, sub-board status, and fan status can be checked.
- Supports remote interaction.
- Compatible with wireless projection.
- 4K outputs support joint display.
- Scene switching for local signal sources can be done in seconds without black screens.
- Image lossless collecting, transmitting and displaying without color cast, color bleed and word blur.


Specifications

DS-C10S-SXXT Series				
Model		DS-C10S-S09T	DS-C10S-S11T	DS-C10S-S22T
Hardware	Slot Number	9 (6 × Input, 3 × Output)	11 (6 × Input, 5 × Output)	22 (12 × Input, 10 × Output)
Motherboard (DS-C10S-MSUT)	Network Interface	1, 10M/100M/1000M self-adaptive Ethernet interface		
	USB Interface	1 × USB 2.0 (Reserved)		
	RS-232 Serial Interface	2		
	Cascade Network Interface	2, SYNC OUT/IN (reserved)		
Network Decoding Board (DS-C10S-SIUT)	Decoding Performance	2-ch@8 MP (low frame rate), 2-ch@6 MP, 2-ch@5 MP, 8-ch@1080p, 16-ch@720p, or 32-ch@D1		
DVI Input Board (DS-C10S-DI4T)	Interface	4 × DVI interface		
	DVI Input Resolution	720P@50Hz, 720P@60Hz, 1080P@50Hz, 1080P@60Hz, 1600 × 1200@60Hz, 1920 × 1200@60Hz		
VGA Input Board (DS-C10S-VI4T)	Interface	4 × VGA interface		
	RGB Input Resolution	720P@50Hz, 720P@60Hz, 1080P@50Hz, 1080P@60Hz, 1600 × 1200@60Hz, 1920 × 1200@60Hz  NOTE The VGA to DVI adaptor is required for VGA input.		
HDMI Input Board (DS-C10S-HI4T)	Interface	4 × HDMI interface		
	HDMI Input Resolution	720P@50Hz, 720P@60Hz, 1080P@50Hz, 1080P@60Hz, 1600 × 1200@60Hz, 1920 × 1200@60Hz, 3840 × 2160@30Hz  NOTE Only No. 1 and 3 interfaces support 3840 × 2160@30Hz.		
SDI Input Board	Interface	4 × SDI interface, PAL/NTSC self-adaptive		

(DS-C10S-SDI4T)	SDI Input Resolution	720P@25Hz, 720P@30Hz, 720P@50Hz, 720P@60Hz, 1080P@25Hz, 1080P@30Hz, 1080P@50Hz, 1080P@60Hz	
YPbPr Input Board (DS-C10S-YI4T)	Input	4 × YPbPr interface	
	DVI Input Resolution	576P@50Hz, 480P@60Hz, 720P@50Hz, 720P@60Hz, 1080P@50Hz, 1080P@60Hz  NOTE The DVI to YPbPr adaptor is required for YPbPr input.	
DP Input Board (DS-C10S-DPI4T)	Interface	4 × DP interface	
	DP Input Resolution	720P@50Hz, 720P@60Hz, 1080P@50Hz, 1080P@60Hz, 1600 × 1200@60Hz, 1920 × 1200@60Hz, 3840 × 2160@30Hz  NOTE Only No. 1 and 3 interfaces support 3840 × 2160@30Hz.	
HDBaseT Input Board (DS-C10S-HDBI4T)	Interface	4 × HDBaseT interface	
	HDBaseT Input Resolution	720P@50Hz, 720P@60Hz, 1080P@50Hz, 1080P@60Hz, 1600 × 1200@60Hz, 1920 × 1200@60Hz, 3840 × 2160@30Hz  NOTE Only No. 1 and 3 interfaces support 3840 × 2160@30Hz.	
DVI Output Board (DS-C10S-DO4T)	Interface	4 × DVI interface	
	DVI Output Resolution	1360 × 768@60Hz, 1400 × 1050@60Hz, 1280 × 720@60Hz, 1024 × 768@60Hz, 1920 × 1080@60Hz, 1920 × 1200@60Hz	
VGA Output Board (DS-C10S-VO4T)	Interface	4 × VGA interface	
	RGB Output Resolution	1360 × 768@60Hz, 1400 × 1050@60Hz, 1280 × 720@60Hz, 1024 × 768@60Hz, 1920 × 1080@60Hz  NOTE The DVI to VGA adaptor is required for VGA output.	
HDMI Output Board (DS-C10S-HO4T)	Interface	4 × HDMI interface	
	HDMI Output Resolution	1360 × 768@60Hz, 1400 × 1050@60Hz, 1280 × 720@60Hz, 1024 × 768@60Hz, 1920 × 1080@60Hz, 1920 × 1200@60Hz, 3840 × 2160@30Hz	
Others	Power Supply	100 to 240 VAC, 50/60 Hz	
		A build-in power supply	Build-in redundant power supply
	Consumption	≤ 250 W (full-loaded)	≤ 450 W (full-loaded)
	Working Temperature	+0° C to +50° C (+32° F to +122° F)	
	Working Humidity	10 to 90% (Non-condensing)	
	Chassis	Standard 4U chassis	Standard 8U chassis
	Dimension (D × H × W)	352 × 177 × 442.4 mm (13.9 × 7 × 17.4 inch)	352 × 354 × 442.4 mm (13.9 × 13.9 × 17.4 inch)
Weight	≤ 20 kg (full-loaded)	≤ 35 kg (full-loaded)	


Physical Interfaces

Front Panel (Take the front and rear panel of DS-C10S-S09T as an example.)

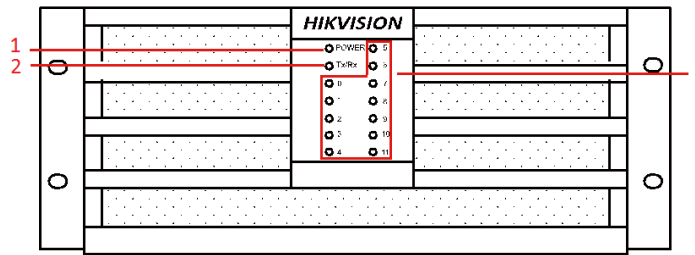

Index	Description	Index	Description
1	Power Indicator	3	Board Indicator
2	Network Indicator		

Rear Panel

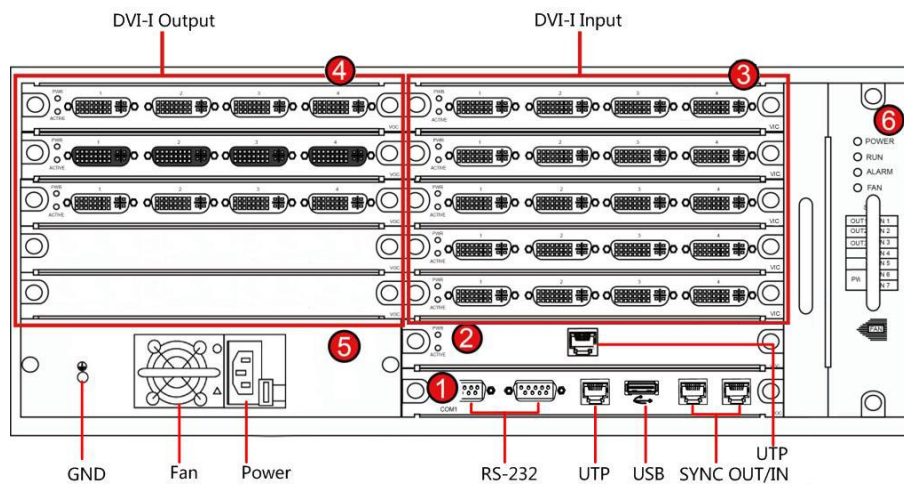

Distributed by

Index	Description	Index	Description
1	Motherboard	4	Signal Output Module
2	Signal Input Module	5	Power
3	Signal Input Module	6	Fan

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada
T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey
T +90 (216)521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam
T +84-974270888
sales.vt@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong
T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea
T +82-(0)31-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com