

DS-KH6320-TE1 Network Indoor Station



The KH6 series IP indoor station, with 7-inch touch screen and Android system, brings you a fluent video and audio communication. By considering the difficulty of deployment of the traditional video intercom, the device has improved the design and can deploy the whole video intercom system by itself independently, without extra devices or configurations, which reduces the deployment time and cost. You can view, chat with, and send permission for the visitor via mobile phone in anywhere. The device can also link other control systems, such as CCTV system, elevator control system, etc.

- 7-inch TFT touch screen with 1024 × 600 resolution
- Convenient Hik-Connect APP Mobile Control
- Receive calls, open the door and live view remotely
- Easy to use without PC
- Easy wizard for quick set up
- Configure the whole system on one touch screen
- Live view of the door station and cameras in public areas
- Support voice messages when no response from the indoor station
- Receive alarms by linkage with a alarm system and notify the center to handle in time
- Elevator access control

▪ Specification


System parameters	
Operating system	Embedded Linux operation system
ROM	32 MB
RAM	128 MB
CPU	Embedded processor
Display parameters	
Screen size	7-inch
Operation method	Capacitive touch screen
Type	Colorful TFT screen
Resolution	1024 × 600
Video parameters	
Lens	/
Resolution	Not supported.
FOV	Not supported.
WDR	/
Video compression standard	/
Focal length	/
Audio parameters	
Audio compression standard	G.711 U
Audio input	Built-in omnidirectional microphone
Audio output	Built-in loudspeaker
Audio compression bitrate	64 Kbps
Audio quality	Noise suppression and echo cancellation
Volume adjustment	Adjustable
Capacity	
Event capacity	200
Notice capacity	16
Linked indoor extensions capacity	5
Linked doorphone capacity	8
Network parameters	
Communication protocol	TCP/IP, SIP, RTSP
Wired network	10/100 Mbps self-adaptive
Wi-Fi standard	/
Bluetooth version	/
3G/4G standard	Not supported.
Zigbee	/
Device interfaces	
Alarm input	8-ch alarm inputs
Network interface	1 RJ-45 10/100 Mbps self-adaptive
TAMPER	/
RS-485	/
USB	/

TF card	Max to 128 G, SD 2.0 or lower version
Alarm output	/
Power interface	1
General	
Button	0
Installation	Surface mounting
Indicator	0
Weight	With package: 675 g Without package: 350 g
Protective level	/
Working temperature	-10 °C to 55 °C (14 °F to 131 °F)
Working humidity	10% to 90%
Dimensions	200 mm × 140 mm × 15.1 mm (7.9" × 5.5" × 0.6")
Battery	/
Application environment	Indoor
Power consumption	≤ 6 W
Language	English, French, Portuguese (Brazil), Spanish, Russian, German, Italian, Polish, Arabic, Turkish, Vietnamese, Hungarian, Dutch, Romanian, Czech, Bulgarian, Ukrainian, Croatian, Serbian, Greek, Portuguese, Slovak

▪ Available Model

DS-KH6320-TE1

▪ Dimension

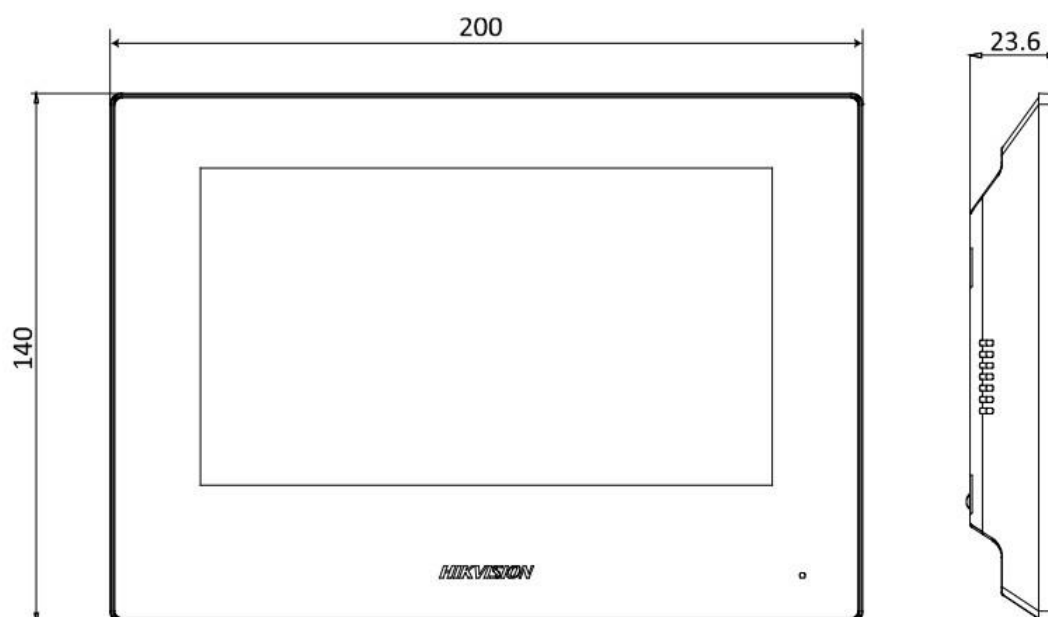

- Accessory
- Optional

DS-KAW50-1	DS-KABH6320-T Indoor Station Table Bracket	DS-KAW50-1N
 A small, rectangular, silver-colored metal enclosure or component.	 A silver-colored metal table bracket with a central mounting point and two angled legs.	 A printed circuit board (PCB) with various electronic components, including a central chip and numerous surface-mount components.

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

