

DP-1208HUHI-K1/E SERIES TURBO HD DVR

Key Feature

- H.265 Pro+/H.265 Pro/H.265 video compression
- HDTVI/AHD/CVI/CVBS/IP video input
- Audio via coaxial cable
- Up to 8/16-ch IP camera inputs (up to 8 MP)
- Max. 800 m for 1080p and 1200 m for 720p HDTVI signal transmission
- Up to 10 TB capacity per HDD



Compression and Recording

- H.265 Pro+ can be enabled to improve encoding efficiency and reduce data storage costs
- Recording at up to 8 MP resolution

Storage and Playback

- Smart search for efficient playback
- Support the third party cloud storage (Dropbox/Google Drive/Microsoft OneDrive)

Smart Function

- Support multiple VCA (Video Content Analytics) events for both analog and smart IP cameras
- Support line crossing detection and intrusion detection of all channels, and 2-ch sudden scene change detection

Network & Ethernet Access

- Hik-Connect & DDNS (Dynamic Domain Name System) for easy network management
- Max. 32/64 Mbps incoming bandwidth and output bandwidth limit configurable

Specification


Model	DP-1204HUHI-K1/E	DP-1208HUHI-K1/E
Perimeter Protection¹		
Line Crossing Detection/ Intrusion Detection	2-ch Enhanced VCA mode on: 4-ch	2-ch Enhanced VCA mode on: 8-ch
Recording		
Video compression	H.265 Pro+/H.265 Pro/H.265/H.264+/H.264	
Encoding resolution	When 8 MP Lite mode is not enabled: 8 MP/5 MP/3K/4 MP/3 MP/1080p/720p/WD1/4CIF/VGA/CIF When 8 MP Lite mode is enabled: 8 MP Lite/5 MP/4 MP/3MP/1080P/720P/WD1/4CIF/VGA/CIF	
Frame rate	Main stream: When 8 MP Lite mode is not enabled: 8 MP@8 fps/5 MP@12 fps/3K@12 fps/4 MP@15 fps/3 MP@18 fps 1080p/720p/WD1/4CIF/VGA/CIF@25 fps (P)/30 fps (N) *: 8 MP@8 fps is only available for channel 1 of DP-1204HUHI-K1/E When 8 MP Lite mode is enabled: 8 MP Lite/5 MP@12 fps/4 MP/3MP/1080P/720P/WD1/4CIF/VGA/CIF@15 fps *: 8 MP Lite is only available for DP-1204HUHI-K1/E	
	Sub-stream: WD1/4CIF/CIF@25fps (P)/30fps (N)	
Video bit rate	32 Kbps to 10 Mbps	
Dual stream	Support	
Stream type	Video, Video & Audio	
Audio compression	G.711u	
Audio bit rate	64 Kbps	
Video and Audio		
IP video input²	2-ch (up to 6-ch) Enhanced IP mode on: 4-ch (up to 8-ch), each up to 4 Mbps Up to 8 MP resolution Support H.265+/H.265/H.264+/H.264 IP cameras	4-ch (up to 12-ch) Enhanced IP mode on: 8-ch (up to 16-ch), each up to 4 Mbps
Analog video input	4-ch BNC interface (1.0 Vp-p, 75 Ω), supporting coaxitron connection	8-ch
HDTVI input	8 MP, 5 MP, 4 MP, 3 MP, 1080p30, 1080p25, 720p60, 720p50, 720p30, 720p25	
AHD input	5 MP, 4 MP, 1080p25, 1080p30, 720p25, 720p30	
HDCVI input	5 MP, 4 MP, 1080p25, 1080p30, 720p25, 720p30	
CVBS input	PAL/NTSC	
CVBS output	N/A	
VGA output	1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz	
HDMI output	1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz	1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 ×

	HDMI and VGA simultaneous output	768/60Hz HDMI and VGA simultaneous output
Audio input	1-ch, RCA (2.0 Vp-p, 1 K Ω)	
	4-ch via coaxial cable	8-ch via coaxial cable
Audio output	1-ch, RCA (Linear, 1 K Ω)	
Two-way audio	1-ch, RCA (2.0 Vp-p, 1 K Ω) (using the first audio input)	
Synchronous playback	4-ch	8-ch
Network		
Total bandwidth	96 Mbps	128 Mbps
Incoming bandwidth (Enhanced IP mode)	Up to 32 Mbps	Up to 64 Mbps
Remote connection	32	64
Network protocol	TCP/IP, PPPoE, DHCP, Hik-Connect, DNS, DDNS, NTP, SADP, NFS, iSCSI, UPnP™, HTTPS, ONVIF	
Network interface	1, RJ45 10M/100M self-adaptive Ethernet interface	
Auxiliary interface		
SATA	1 SATA interface	
Capacity	Up to 10 TB capacity for each disk	
Serial interface	N/A	
USB interface	Rear panel: 2 × USB 2.0	
Alarm in/out	N/A	
General		
Power supply	12 VDC, 1.5 A	12 VDC, 1.8 A
Consumption (without HDD)	≤ 6 W	≤ 8 W
Working temperature	-10 °C to +55 °C (+14 °F to +131 °F)	
Working humidity	10% to 90%	
Dimension (W × D × H)	265 × 225 × 48 mm (10.4 × 8.9 × 1.9 inch)	
Weight (without HDD)	≤ 1.6 kg (3.5 lb)	

Note:

- 1: Enabling enhanced VCA mode will maximize the connectable channel number for perimeter protection (line crossing detection and intrusion detection), but disable 2K/4K HDMI output resolution and 4 MP/5 MP/8 MP signal input.
- 2: Enhanced IP mode might be conflicted with smart events (perimeter protection) or other functions, please refer to the user manual for details.

Physical Interface

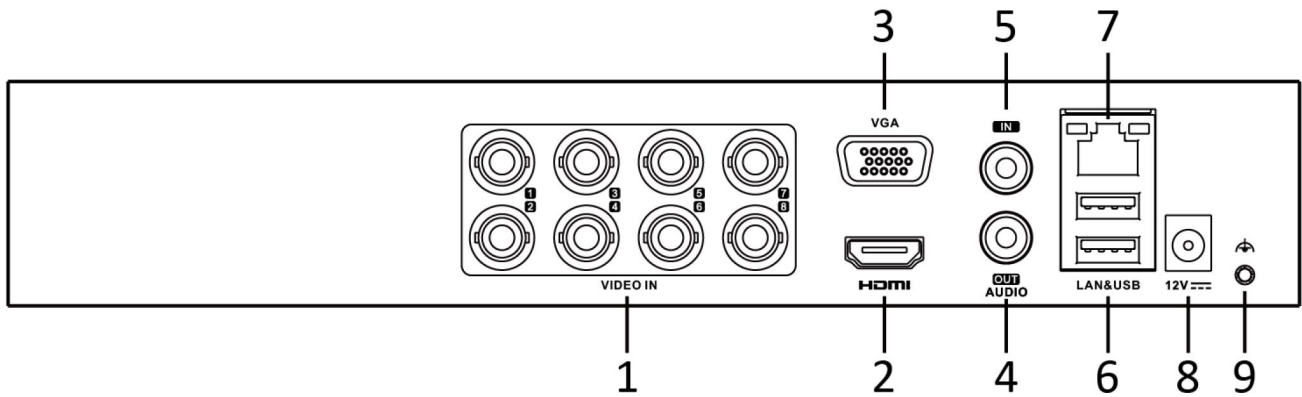

No.	Description	No.	Description
1	Video and Coaxial Audio In	6	USB Interface
2	HDMI Interface	7	LAN Network Interface
3	VGA Interface	8	12 VDC Power Input
4	AUDIO OUT, RCA Connector	9	GND
5	AUDIO IN, RCA Connector		