

DS-K1T502DBWX Access Control Terminal



- Manage access control and intercom functions in one device
- IP65 & IK09 protections, as well as increased stability with zinc alloy materials
- Supports multiple authentication methods
- Remote control via the Hik-Connect mobile app
- Connects to external access controller via Wiegand protocol
- Video intercom via SIP protocol. Supported SIP server: Brekeke, miniSipServer, and FreePBX
- RS-485 communication for connecting external card reader and calling elevator
- Supports AP mode
- Supports opening door via bluetooth according to HCC and HCAC
- Press calling button to call one of the following objects: management center, indoor station, specified indoor station, or Hik-Connect App
- Supports up to 256 GB SD card memory



▪ Specification

System	
Operating system	Linux
Video	
Video compression standard	H.264 and H.265
Network	
Wired network	10 M/100 M self-adaptive
Wi-Fi	Support
Bluetooth	Support
Interface	
Network interface	1
Lock control	1
Exit button	1
Door contact input	1
Alarm input	1
Alarm output	1
TAMPER	1
RS-485	1
Wiegand	1 (Input and output)
SD Card Slot	1
Capacity	
Card capacity	100,000
Event capacity	300,000
Authentication	
Card type	M1 card, DESfire card
Card reading distance	0 to 3 cm
Function	
Two-way audio	Support
Video intercom	Support
Hik-Connect	Support
General	
Power supply	1 A (12 VDC to 24 VDC)
Power consumption	≤12 W
Working temperature	-40 °C to 70 °C (-40 °F to 158 °F)
Protective level	IK09, IP65
Language	Arabic, English, French, Indonesian, Italian, Portuguese (Brazil), Russian, Spanish (Europe), Thai, Ukrainian, Vietnamese, German, Polish, Hungarian, Czech, Romanian, Bulgarian, Croatian, Serbian, Greek, Slovak, Portuguese, and Dutch

▪ Available Model

DS-K1T502DBWX

▪ Dimension

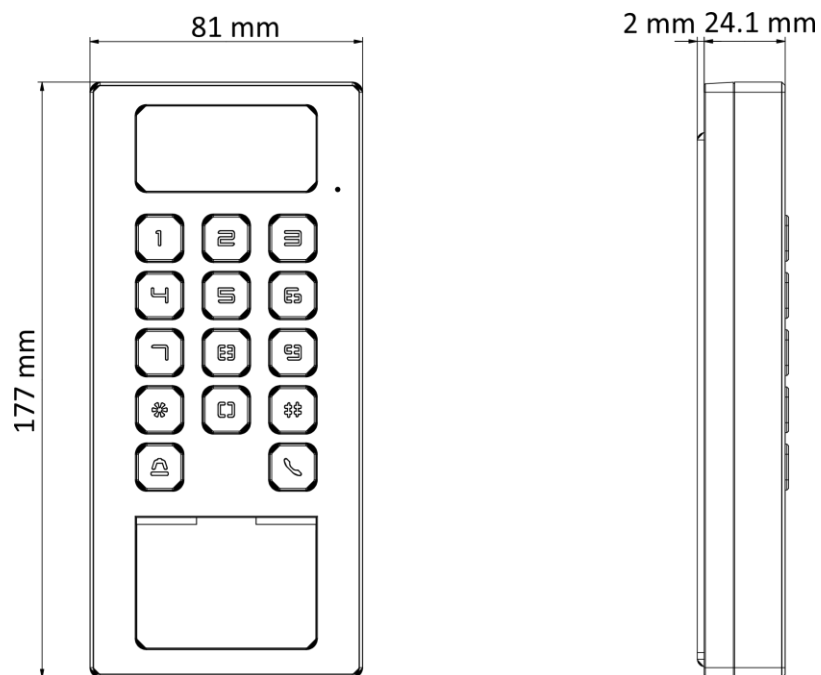

- Accessory
- Optional

DS-KAB502-S1



Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

